


Orbit's RSMCK-2C Control Panel Kit

Specifications:

- Extremely Economical For Snow Melting Applications
- NEMA 1 UL Listed Panel Box (Indoor Rating)
- 100 Amp Capacity (Two 50Amp Contactors)
- Aerial Mounted Automatic Snow Switch
- Pre Wired And Numbered Terminal Connections

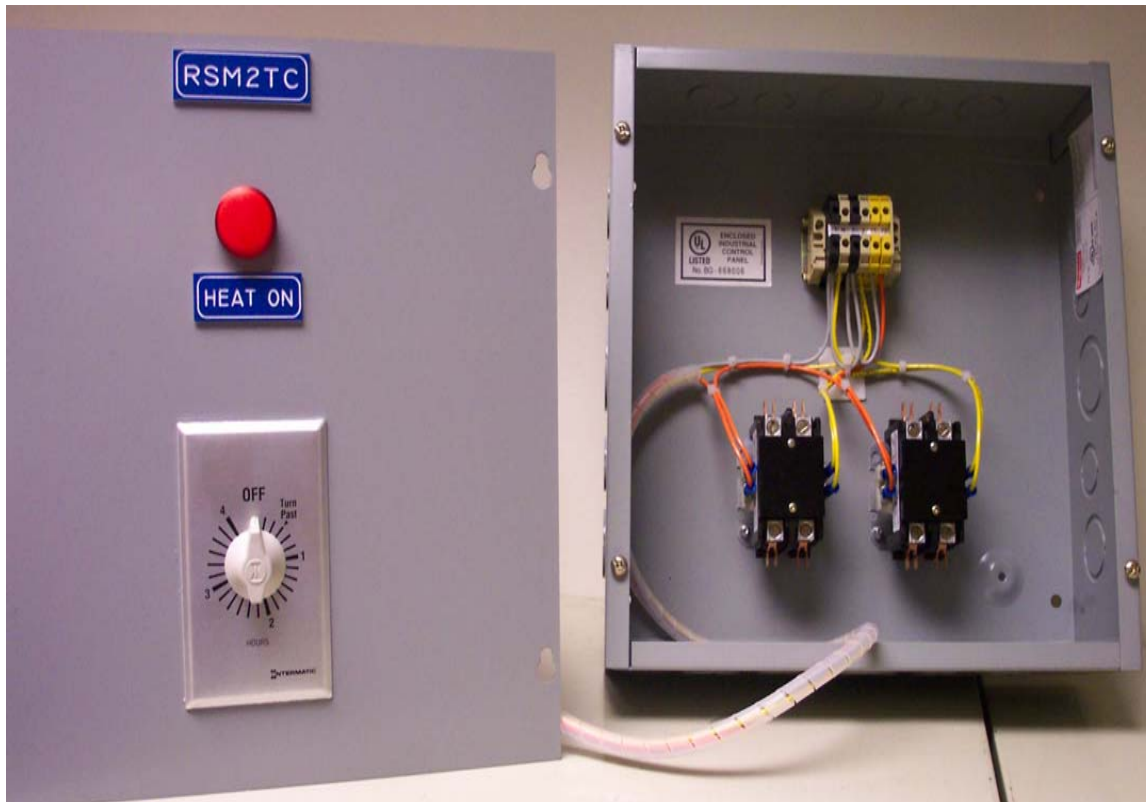

- Wiring Diagram
- "Heat On" Pilot Light
- 4 Hour Manual Override Timer



Included
Aerial
Sensor

WARM YOUR FLOOR

Orbit's RSMCK-4C Control Panel Kit

Specifications:

- Extremely Economical For Snow Melting Applications
- NEMA 1 UL Listed Panel Box (Indoor Rating)
- 200 Amp Capacity (Four 50Amp Contactors)
- Aerial Mounted Automatic Snow Switch
- Pre Wired And Numbered Terminal Connections



- Wiring Diagram
- "Heat On" Pilot Light
- 4 Hour Manual Override Timer



Included
Aerial
Sensor



Orbit's RSM24V Conversion Kit

Specifications:

- Extremely Economical For Snow Melting Applications
- NEMA 1 UL Listed Panel Box (Indoor Rating)
- Includes Required Relays
- Transforms 120V Down To 24V
- Pavement Mounted Snow Sensor
- Pre Wired And Numbered Terminal Connections



The RSM24V Conversion Kit is designed to convert the standard RSMCK-2C and RSMCK-4C Arial Sensing Line Voltage Control Panels into 24 Volt pavement sensing controllers.

Designed to work in conjunction with a Pavement Mounted Sensor, this panel is a very economical yet extremely dependable approach to applications requiring surface monitoring.




Included Pavement Sensor

WARM YOUR FLOOR

Orbit's RSMCK-2C Control Panel Kit

Specifications:

- Extremely Economical For Roof And Gutter Applications
- NEMA 1 UL Listed Panel Box (Indoor Rating)
- 100 Amp Capacity (Two 50Amp Contactors)
- Option Of Roof Or Gutter Sensing Switch
- Pre Wired And Numbered Terminal Connections
- Wiring Diagram
- "Heat On" Pilot Light
- 4 Hour Manual Override Timer

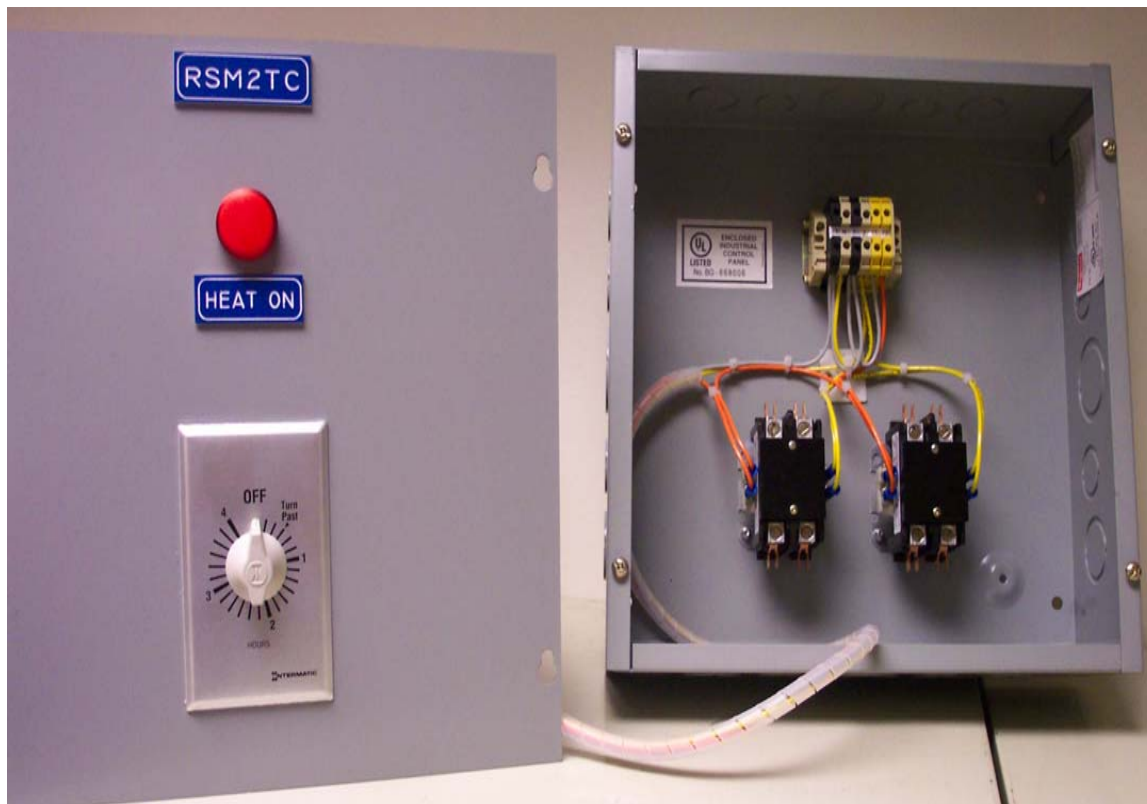

Gutter Sensor

Roof Sensor




WARM YOUR FLOOR

Orbit's RSMCK-4C Control Panel Kit

Specifications:

- Extremely Economical For Roof And Gutter Applications
- NEMA 1 UL Listed Panel Box (Indoor Rating)
- 200 Amp Capacity (Four 50Amp Contactors)
- Option Of Roof Or Gutter Sensing Switch
- Pre Wired And Numbered Terminal Connections
 - Wiring Diagram
 - "Heat On" Pilot Light
 - 4 Hour Manual Override Timer

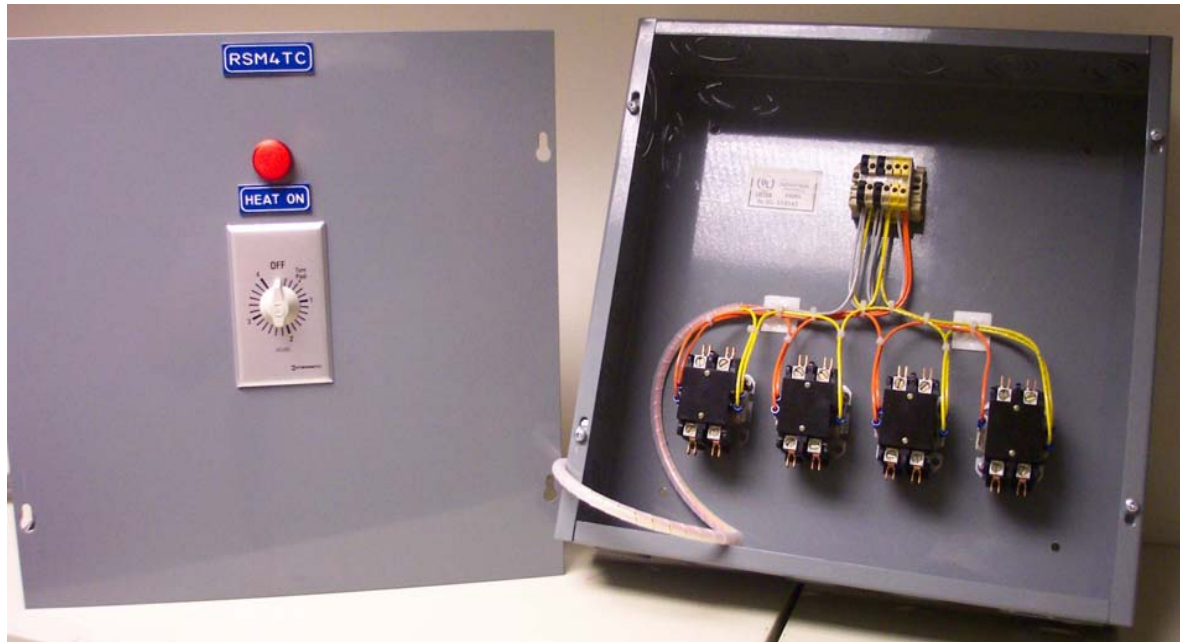

Gutter Sensor

Roof Sensor

